



- FICHA TECNICA -

**GF60-UVC-270nm**



Spectrogram

Wave: 280.0nm Value: 3.320uW/cm<sup>2</sup>/nm

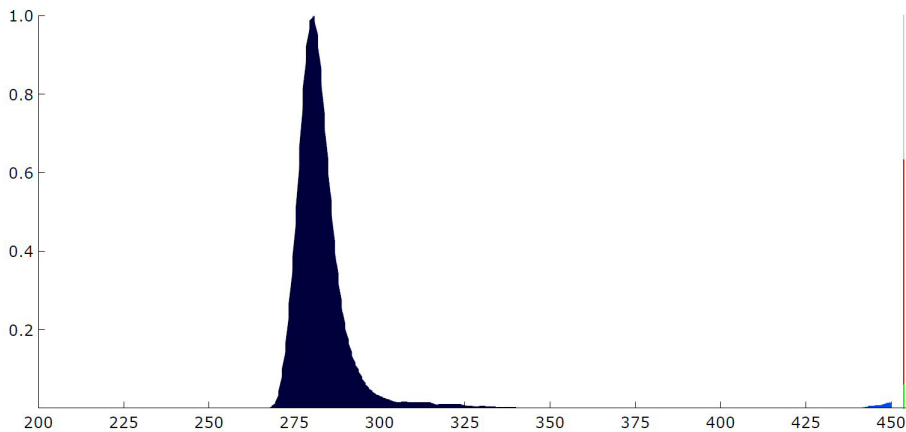

<b>Modelo</b>	<b>UVC-GF60</b>
<b>Referencia</b>	<b>GF60-UVC-270nm</b>
Conexión	24Vdc
LEDs	SMD3737
Consumo	2.8-3 W/m.
Material	Cobre (2 capas)
Acabado	PCB flexible de triple capa y cinta 3M posterior
Peso	-
Dimensiones	5000x8x3mm
Base	-
Apertura	180°
Lm	-
nm	270-300nm
IP	IP20
CLASE	Clase III
Standards	EMC 2004/108/EC LVD73/23/EEC CE
Colores	UVC : 380-390nm
T(operación)	-20°C á +50°C
T(stock)	-40°C á +60°C
Humedad	10 á 90%
Vida útil	30.000 h (>70%)
Notas:	<b>Recomendado montaje sobre perfil de aluminio</b>
Ventajas	-Amoldable -Fácil montaje -Larga vida útil -Económico