




NEON-F1200

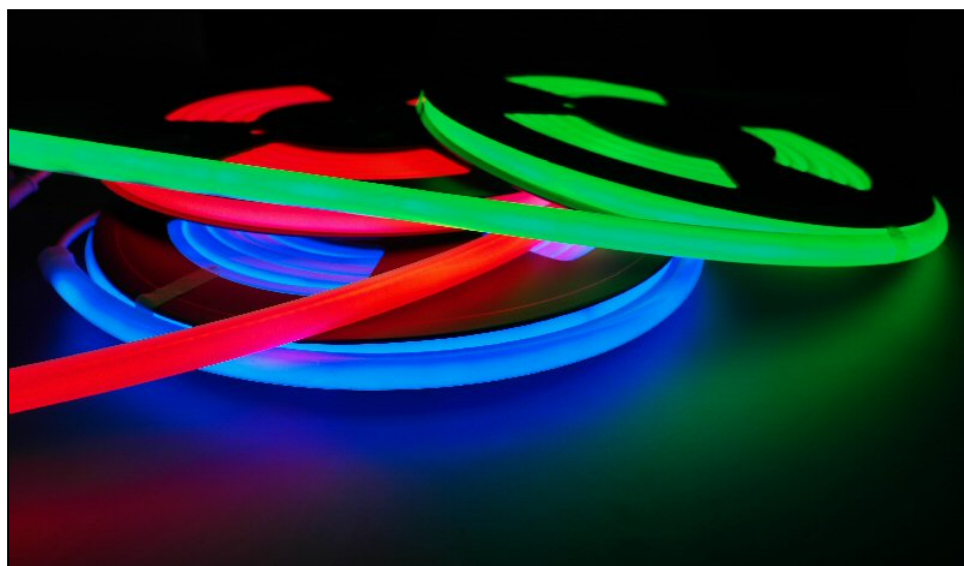

Modelo	NEON
Referencia	NEON-F1200W NEON-F1200WW NEON-F1200R NEON-F1200Y NEON-F1200G NEON-F1200B NEON-SF480Multi
Conexión	24Vdc
LEDs	1200*SMD3528 ó 480*SMD5050Multi
Consumo	12W/m aprox.
Material	Cobre + funda silicona traslúcida
Acabado	PCB flexible doble capa
Peso	-
Dimensiones	5000 x10 x 10mm Cortable cada 5cm
Base	-
Apertura	180°
Lm	- Lm/m aprox.
IP	IP65
CLASE	Clase III
Standards	EMC 2004/108/EC LVD73/23/EEC CE
Colores	W: Blanco frío 6000K WW: Blanco cálido 3000K R: Rojo(red) Y: Naranja(Yellow) G: Verde(Green) B: Azul(Blue) Multi: Multicolor
T(operación)	-20°C á +50°C
T(stock)	-40°C á +60°C
Humedad	10 á 90%
Vida útil	35.000 h (>70%)
Notas:	-
Ventajas	-Amoldable -Fácil montaje -Larga vida útil -Efecto logrado