





d	FLOOD-Lux	FLOOD-Øcm	SPOT-Lux	SPOT Øcm
50cm	3.401 Lux	50	15.224 Lux	10
30cm	7.474 Lux	30	49.100 Lux	6
20 cm	17.018 Lux	20	199.555 Lux	4

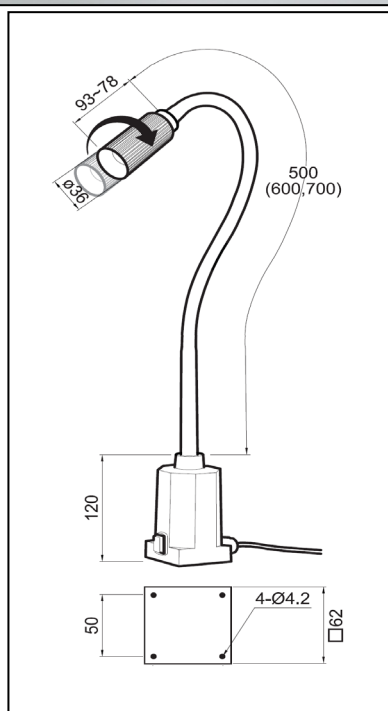

Modelo	HALOSPOT
Referencia	HALOSPOT50 (100-240AC)
Conexión	100-240Vac
LED	CREE-XP1 (5W)
Material	Aluminio / Goma / Plástico
Acabado	Anodizado negro y funda de goma lavable IP65
Peso	1.5 Kgr aprox
Base	60*60mm; h=120mm 4xM4@50x50mm
Brazo	Orientable; Brazo 50cm
Cabeza	D36*70mm
Interruptor	SI
Protección	SI + Lente convexa
Deslumbramiento	SI (remetida)
IP	IP65
CLASE	Clase III
Standarts	-Compatibilidad Electromagnética (89/336/EEC) -Seguridad eléctrica 91/263/EEC, 92/31/EEC, 93/68/EEC. -CE
Accesorios	C-03 (Abrazadera mesa) L-03 (Angulo para pared) M-03 (Base magnética)
Notas	Foco ajustable + á 20cm: D: 4 á 20cm + á 30cm: D: 6 á 30cm + á 20cm: D: 10 á 50cm

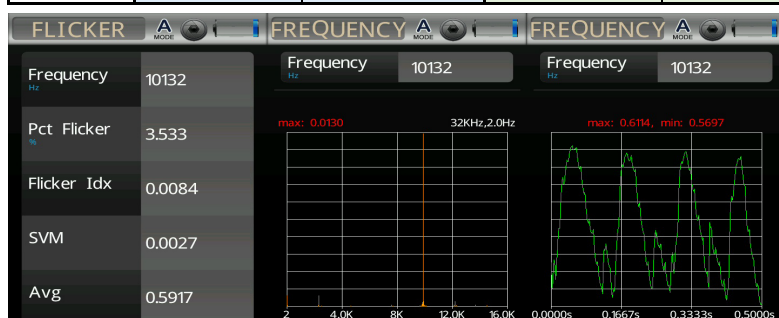