


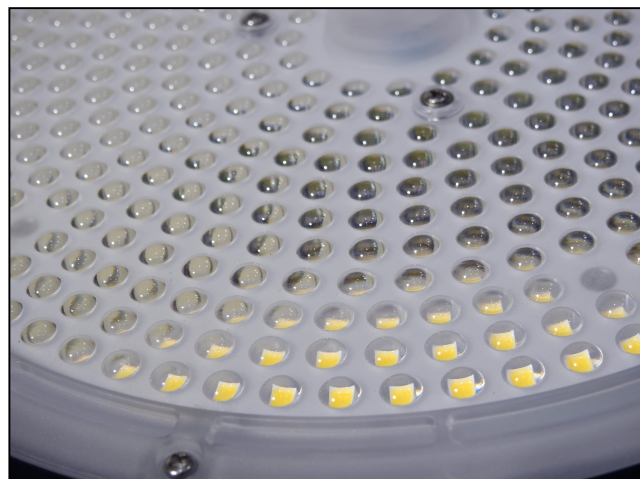

Modelo	BAY-GLB200
Referencia	BAY-GLB200W-Reg
Connexión	100-264Vac, 47-63Hz Ta(Max) = 45°C Aislamiento 6KV
Alimentador	SOSEN SS-200CNL-G260 Po=200W; PF>97 Vout=180-260V Iout=0.36-1A (1A) THD=7% Tc(Max) = 90°C Ta(Max) = 55°C Regulable 1-10 opcional
LEDs	480*LumiLEDs SMD3030 160Lm/W; IRC80; 5700K
Luz (Lm)	32.000 Lm aprox; 160Lm/W; 5700K; IRC>80 Lente microprismática Convexa 60° UGR<25
Ra	>80
Material	Aluminio IP65; IK09
Acabados	Pintado Proteccion cristal
Peso	3 Kgr aprox
Dimensiones	D350 * h150mm mm
Base	(gancho)
Protección	Policarbonato
Anti – Deslumbramiento	NO
IP	IP65
CLASE	Clase I
Medidas	Disipador D383*65 Altura: 120mm
Standards	EMC2004/108/EC LVD73/23/EEC CE
Accesorios	Sensor de Luz
Color	Blanco frío 6000K
NOTAS	Reg.1-10V Reg. Potenciómetro 100K